
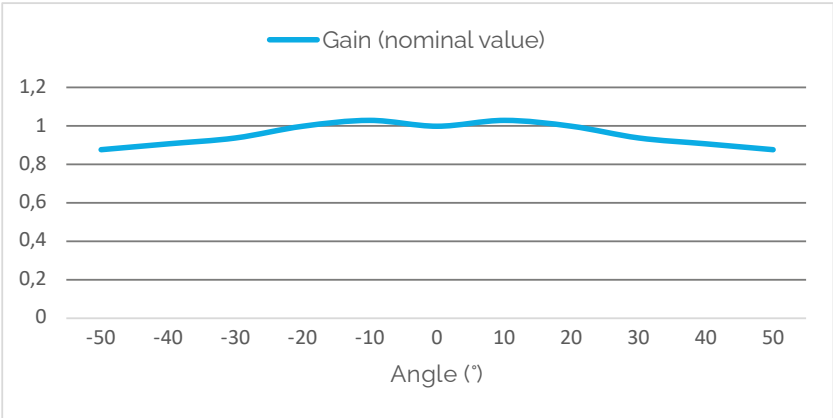


050

Flexible PVC screen for **front projection**, available in **white** with **100% black-out** black backing, and **M1 non-flammable rating**, for making all types of **front-projection screens**.  
Its black-out back prevents interference from light sources positioned behind the screen (daylight, projectors, etc.). This cloth is therefore recommended for making screens positioned in front of windows, glass walls, etc.  
The Blackout Screen is particularly appreciated for installation on **flats with tensioners**, but it can also be used for making classic projection screens.  
During manufacture, we ensure a perfectly regular surface to offer you **optimum optical properties**.  
We also ensure **the flattest possible surface**, working in our **HF welding workshops** to offer super-thin, super-smooth and virtually-invisible welds for **suspended screens**, **frame-tensioned screens** and even **mounted on motorised rollers**.  
This 100% PVC fabric is **washable** and suitable for use both indoors and **outdoors**. It also has **sound insulation** properties.

Technical data	Value	Notes
Width	210 cm	
Weight	560 g/m <sup>2</sup>	Standard: NF T 54-101
Thickness	0.42 mm	Standard: NF T 54-101
Flame-retardant rating	 M1	Standard: NF P 92-507
Composition	100% PVC	
Roll length	100 m	Cut-to-length possible



## Additional information

Care	Wash with soapy water, rinse with fresh water. Do not use harsh abrasive detergents. We recommend testing cleaning products on a small area before cleaning the entire surface.
Storage recommendations	Store indoors (away from light sources) at room temperature ( $\pm 23^{\circ}\text{C}$ ). Storage should not exceed 6 months between use.
Directions for use	The screen must be stored at room temperature ( $\pm 23^{\circ}\text{C}$ ) for a minimum of 24hrs before use.
High-frequency (HF) welding	Excellent HF weldability. Using virtually invisible assembly seams, we make screens of all dimensions and finishes in our own workshops.
Accessories	Weighting poles Elastic tensioners, bungees



## CONTACT OUR EXPORT TEAM

+33 (0)6 23 21 50 28



[export@azur-scenic.com](mailto:export@azur-scenic.com)

The information in this document provides generic values that describe only the standard technical specifications and chemical composition of the products concerned. No guarantee is offered. Any images are non-contractual. The names of the colours are given for information purposes only and do not guarantee a specific colour.