



Rear-Projection Screen Translucent Frosted

Ref. 2231




010


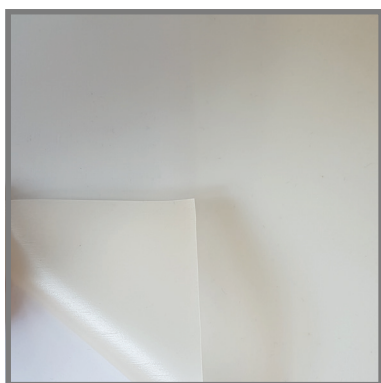


Flexible screen in **translucent non-coloured** frosted PVC with **M2 flame-retardant** rating, ideal for both **rear-projection** and **front-projection**.

During manufacture, we ensure consistent transparency for **optimum optical properties**. We also ensure **the flattest possible surface**, working in our **HF welding workshops** to offer super-thin, super-smooth and virtually-invisible welds for **suspended screens**, screens **tensioned on frames** and even mounted on **motorised rollers**.

This PVC screen is **washable** and suitable for indoor and **outdoor use**, and also has **sound insulation** properties.

Technical data	Value	Notes
Width	140 cm	
Weight	415 g/m ²	Standard: NF T 54-101
Thickness	0.3 mm	Standard: NF T 54-101
Flame-retardant rating	 M2	Standard: NF P 92-503
Composition	100% PVC	
Roll length	30 m	Cut-to-length possible
Elongation at break	Machine direction: > 160% Transverse direction: > 160%	NF EN ISO 527-3
Tensile strength	Machine direction: > 13 MPa Transverse direction: > 13 MPa	NF EN ISO 527-3

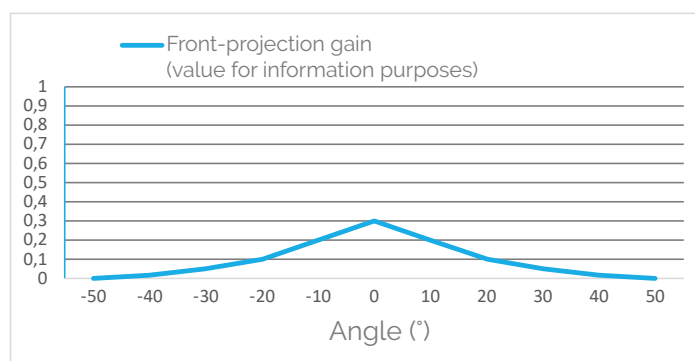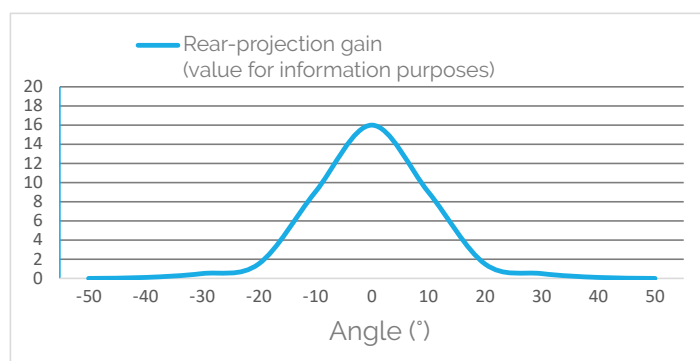

Rear-Projection Screen— Translucent Frosted


Ref. 2231



Azur Scenic

Additional information

Care	Wash with soapy water, rinse with fresh water. Do not use harsh abrasive detergents. We recommend testing cleaning products on a small area before cleaning the entire surface.
Storage recommendations	Store indoors (away from light sources) at room temperature ($\pm 23^{\circ}\text{C}$). Storage should not exceed 6 months between use.
Directions for use	The screen must be stored at room temperature ($\pm 23^{\circ}\text{C}$) for a minimum of 24 hrs before use. The screen offers one matte grained side and one smooth side with a more glossy finish. For optimum projection quality, we recommend positioning the grained side towards the audience.
High-frequency (HF) welding	Excellent HF weldability. Using virtually invisible assembly seams, we make screens of all dimensions and finishes in our own workshops.
Accessories	Weighting poles Elastic tensioners, bungees

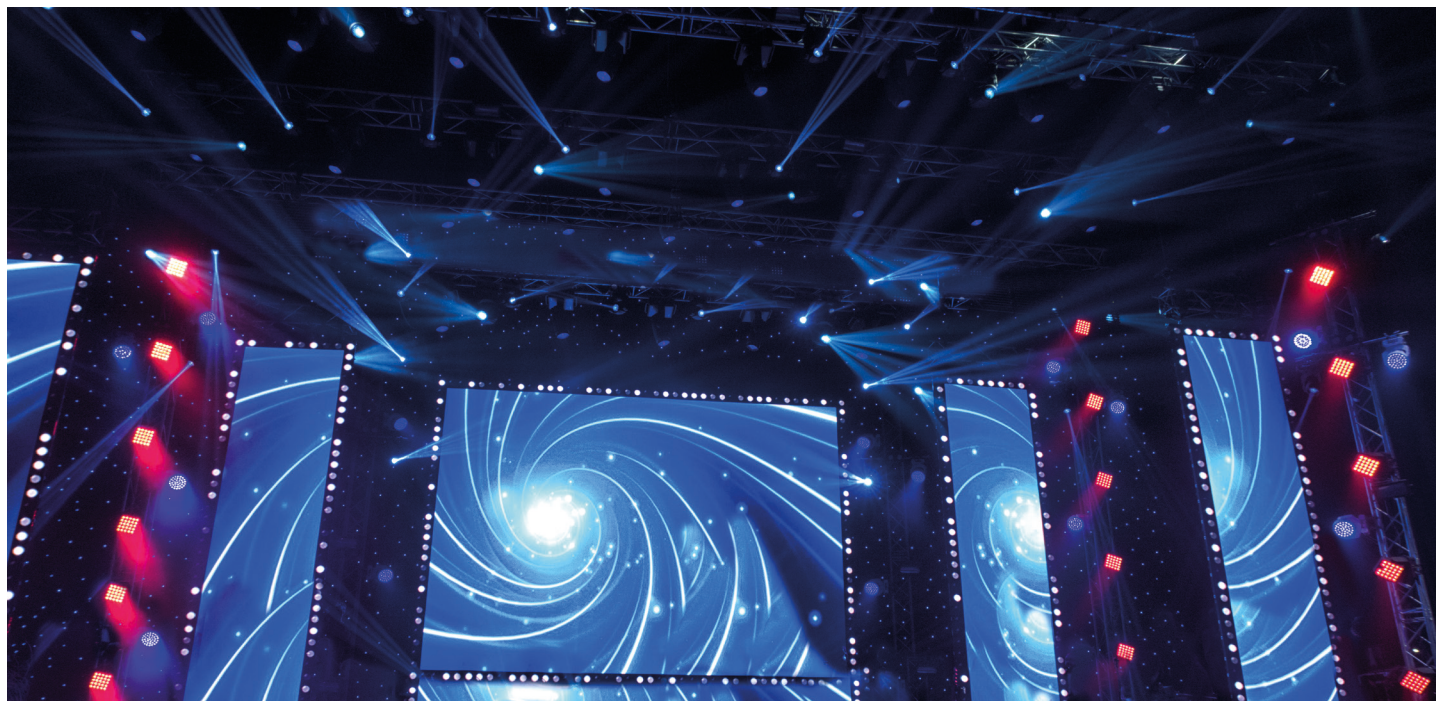

CONTACT OUR EXPORT TEAM

+33 (0)6 23 21 50 28



export@azur-scenic.com

The information in this document provides generic values that describe only the standard technical specifications and chemical composition of the products concerned. No guarantee is offered. Any images are non-contractual. The names of the colours are given for information purposes only and do not guarantee a specific colour.

