




Truck-style **reinforced tarpaulin material with** M2 flame-retardant rating, available in 11 colours.

Both sides feature a gloss finish, each giving a slightly different effect: 1 smooth side and 1 side with "grained" woven effect.

Our workshops offer hard-wearing waterproof assembly in a range of finishes using the **HF welding** technique.

This **hard-wearing** tarpaulin material is **easy-care** and **UV-resistant** and suitable for use both indoors and **outdoors**.

It also offers **sound-insulation** properties and can be used for a range of applications including making tents and big tops, dressing stage boxes and blocks, sets, stands and more...

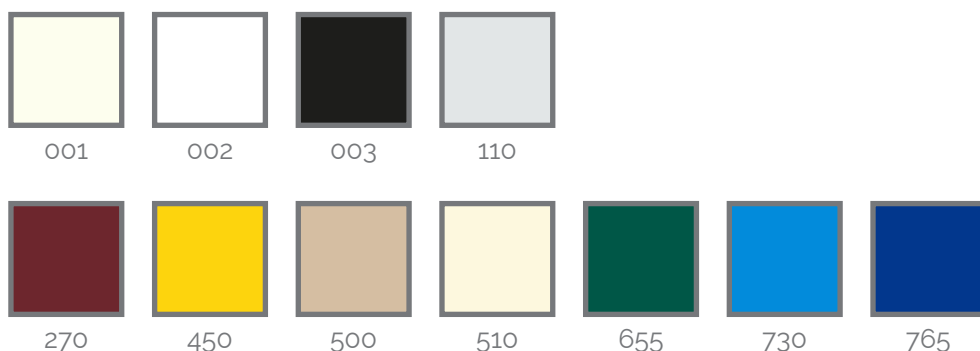

Technical data	Value	Notes
Width	250 cm	
Weight	580 g/m <sup>2</sup>	Standard: EN ISO 2286-2
Thickness	0.5 mm	
Flame-retardant rating	 M2	Standard: NF P 92-507
Composition	100% Polyester base + PVC treatment	
Roll length	65 m (rolled full-width)	Possibility to order half-lengths
Tensile strength at break	Warp: 2700 N/5 cm Weft: 2900 N/5 cm	Standard: EN ISO 1421/V1
Tear Force	Warp: 300 N Weft: 300 N	Standard: DIN 53363
Adhesion	20 N/cm	

Technical data	Value	Notes
Thermal resistance	-40°C / +70°C	
Light fastness of colours	> 6	Standard: EN ISO 105 B02
Crease resistance	100,000 Split-resistant	Standard: DIN 53359 A
Finishes	Reversible gloss varnish Fungicide treatment UV-resistant treatment	

Additional information	
Care	<p>Do not use solvents or strong alkaline cleaning products. Use of such products may damage the surface of the tarpaulin. Use alkali-free detergents.</p> <p>Dampen the surface with cold or warm water, then apply the detergent following the instructions for dilution given by the manufacturer (spray or apply directly to surface with a soft cloth). Allow detergent to act for 5 minutes then wipe with soft cloth. Rinse dirt and detergent residue using cold or warm water. Dry carefully with soft dry cloth. Avoid warming the surface. Do not leave to dry in the open air as this may affect the colour. We recommend testing cleaning products on a small area before cleaning the entire surface.</p>
Storage recommendations	<p>Store indoors (away from light sources) in a dry place at room temperature. Store rolled to avoid creasing.</p> <p>If stored folded, do not compress.</p>
Cutting recommendations	Cold-cut (low risk of fraying)
High-frequency (HF) welding	<p>Good HF weldability.</p> <p>We make screens of all dimensions and finishes in our own workshops.</p>
Appearance	<p>Classic "truck-back" tarpaulin in gloss varnished finish</p> <p>1 very smooth side</p> <p>1 more textured side with grained appearance</p>
Recommended use	<p>Dressing structures, stages, stands, tensioned tarpaulins, backdrops and scenery, etc.</p> <p>Making marquees, tents and big tops</p> <p>Indoor and outdoor use</p>
Accessories	Tensioners, clips, bungee cords, etc.



## CONTACT OUR EXPORT TEAM

+33 (0)6 23 21 50 28



[export@azur-scenic.com](mailto:export@azur-scenic.com)

The information in this document provides generic values that describe only the standard technical specifications and chemical composition of the products concerned. No guarantee is offered. Any images are non-contractual. The names of the colours are given for information purposes only and do not guarantee a specific colour.