Danube Velour



Ref: 3503















A medium-weight voile material with **acoustic** properties, rated **M1** flame-retardant and available in a **stylish** range of **colours**, including pure white.

Washable velour in FR Trevira CS polyester, with good UV resistance, perfect for indoor and outdoor use.

This velour is particularly suited to making **stage curtains** and **decorative curtains**.



SEE DETAILS ON OPPOSITE PAGE:

5 standard "Theatre" colours available cut-to-length or as full rolls 33 "Decorative" colours sold by the roll, including pure white

Τ

	ATRE co							
Classic colours from the stage scenery range. Available as complete rolls or cut-to-length.			Black 003	Grey 100	Ruby 240	Bordeaux 290	Navy 790	
DECORATIVE colours								
Non-standard colours. Available as whole rolls only (usual minimum approx. 30/35 linear metres).		Ecru 001	White 002	Lead grey 130	Steel grey 170	Red 200		
ics	Vermillion 250	Pumpkin 340	Brick 370	Copper 380	Mustard 440	Lemon 450	Beige 500	
	Light beige 501	Sisal 510	Coffee 530	Brown 540	Maroon 550	Moka 570	Absinthe green 620	
	Grey-green 640	Olive 660	Pine green 680	Bottle green 690	Turquoise 710	Sapphire 750	Ocean 770	
	Teal 780	Denim blue 782	Petrol 784	Midnight blue 786	Violet 800	Fuchsia 950	Magenta 990	
	Name		Danube V	Danube Velour				
rist	Reference		3503	3503				
Characteristics	Width		± 140 cm					
	Weight		-	± 380 g/m ²				
	Thickness		1.5 mm	± 1.5 mm Standard NF P92-507				
	Flame-retardant rating		C1					
	Composition		40% Trevir	40% Trevira CS - 60% FR Polyester				
	Length of whole roll			± 30 linear metres (lengths not calibrated, meterage may vary)				
	Supplied in		Rolled ful	Rolled full-width				

Colours from the Theatre range only


Edition July 2023

Cut-to-length

Acoustic

Additional information

Tensile strength	Warp: 1200 Weft: 1150	Standard ISO 13934-1
Abrasion resistance	> 60,000 cycles	Standard ISO 12947
Pilling (resistance to bobbling)	Class A	Standard ISO 12945-2
Light fastness	4-5	Standard ISO 105-B02
Acoustic properties WSAC (weighted sound absorption coefficient) SAC (sound absorption class)	0.70 α _W C (highly absorbent)	Standard ISO 354

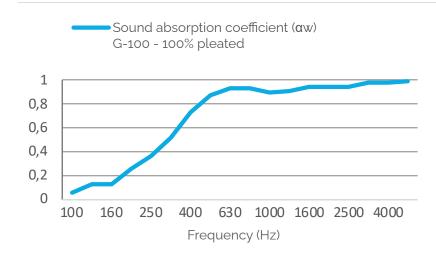

Appearance	Heavy-weight velour with a thick, short nap and light sheen				
Care					
Storage recommendations	Rolled storage indoors is recommended (away from light sources and humidity)				
Directions for use	Can be made up to any dimensions and with all finishing options (eyelets or rivets, tabs, sleeves, etc.) in our workshops Indoor and/or outdoor use				
Recommended use	Stage curtains Banners, Friezes Partition curtains, etc.				
Accessories	 Production accessories (straps, ballast chain, etc.) Mounting accessories (clamps, knots, carabiners, etc.) 				
Printing	White colour is printable (please contact us)				
	CONTACT OUR EXPORT TEAM				

+33 (0)6 23 21 50 28



export@azur-scenic.com

in this document provides generic values that describe only the standard technical specifications and chemical composition of the products concerned. No guarantee is offered. Any images are non-contractual. The names of the colours are given for information purposes only and do not guarantee a specific colour. The information