

A go-to product for **acoustic absorption** properties, with **M1** flame-retardant rating it is ideal for controlling ambient noise in all types of indoor spaces.



This thick brushed-effect material has a fleecy finish on both sides and is an **affordable** alternative to velours for making **highly absorbent acoustic curtains**, and can also be used as lining material. Fully **opaque**, Kalmuk can also be used to make black boxes.



001




003

Technical data	Value	Notes
Width	300 cm	Width 160 cm, cream colour available to order
Weight	500 g/m ²	
Thickness	2 mm	
Flame-retardant rating	 M1  B1	
Composition	100% Cotton	
Roll length	30 m (supplied in bales)	Cut-to-length possible
Acoustic properties		Standard: ISO 354
WSAC (weighted sound absorption coefficient)	0.75 α_w	Standard: ISO 11654
SAC (sound absorption class)	C (highly absorbent)	Standard: ISO 11654
NRC (noise reduction coefficient)	0.75	Standard: ASTM C423
SAA (sound absorption average)	0.72	Standard: ASTM C423

»Sound absorption curve on page 2



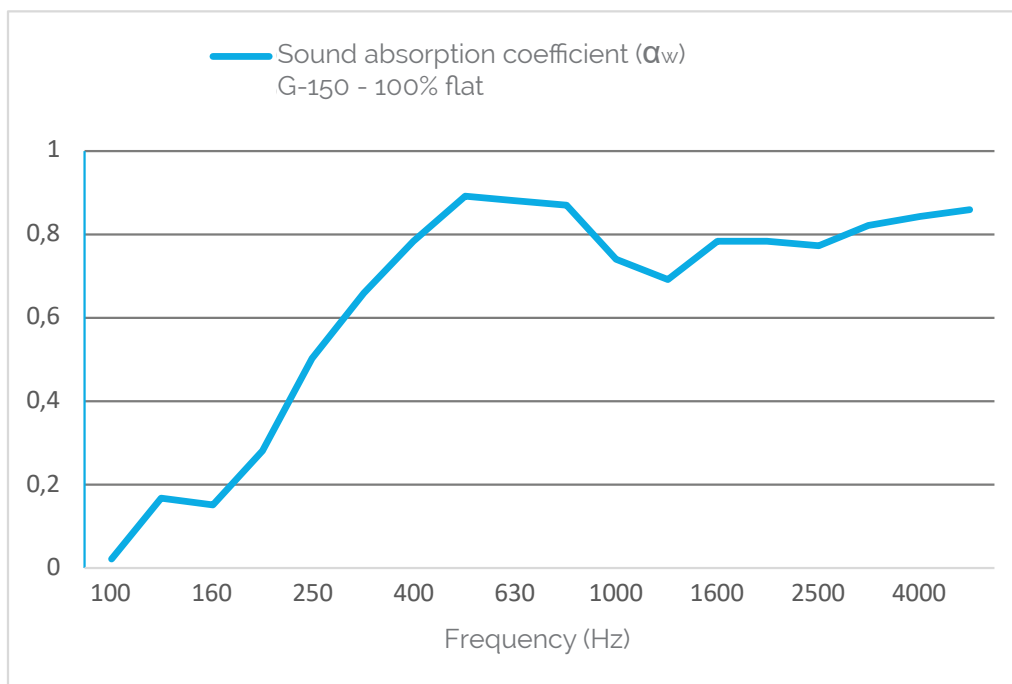

Additional information

Care



Storage

Store indoors (away from moisture)

Appearance

Brushed fleece-type fabric on both sides

Recommended applications

Curtains, lining, black boxes, etc.

CONTACT OUR EXPORT TEAM

+33 (0)6 23 21 50 28



export@azur-scenic.com

The information in this document provides generic values that describe only the standard technical specifications and chemical composition of the products concerned. No guarantee is offered. Any images are non-contractual. The names of the colours are given for information purposes only and do not guarantee a specific colour.