


Euro Blackout Cloth

Ref: 6321

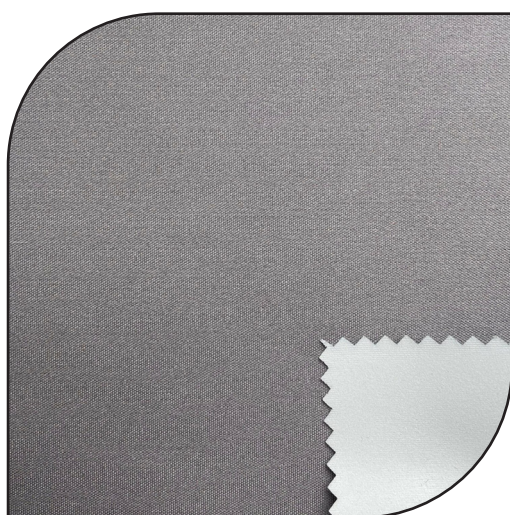

A **low-cost alternative** to our M1 Blackout Cloth, our Euro Blackout Cloth meets **European standard** Class 1 in compliance with standard EN13773, as well as British and German flame-retardant safety standards.

This perfectly **opaque** material is available in a wide range of **colours** and can also be dyed in **your choice of colours** on one side.




A **100% blackout** fabric with a particularly **fine** finish, it also boasts an off-white treatment that gives it **light-reflective and heat-reflective properties**. In addition, this material is also **washable and UV-resistant**, making it suitable for use both indoors and outdoors.

This textile is also great for making **blackout curtains**, as well as for **dressing stage flats**.

Colours






Black 003	Snow 020	Grey 100	Light grey 110	Pearl 120	Steel 170	Slate 180	Burgundy 288
Light beige 501	Jute 515	Sepia 520	Moka 570	Caramel 580	Spinach 670	Powder blue 708	Sky blue 720
			Option of your choice of colour using the Pantone colour chart, from 25 lm				
Royal blue 760	Plum 860						

Characteristics

Name	Euro Blackout Cloth	
Reference	6321	
Length of whole bolt	25 m	
Width	280 cm	
Cut-to-length	White colour: Yes, minimum 5 linear metres Other colours: No, complete lengths only	
Weight	280 g/m ²	
Thickness	0.37 mm	
Composition	100% Polyester with white acrylic flocking on reverse	
Flame-retardant rating	 Class 1	Standard EN13773
	 B1	Standard DIN4102
	 Type C	Standard BS5867
Printable	Plain printing in any colour, min. 1 roll (ask for quotation)	



Additional information

Appearance	Fabric with a fine, stylish appearance 1 coloured woven side with a smooth and slightly shiny appearance 1 off-white coated side with a lightly quilted appearance		
Supplied in	Rolled full-width		
Care	    		
Storage recommendations	Rolled storage to avoid crease marks.		
Directions for use	Can be made up to any dimensions and with all finishing options (eyelets or rivets, tabs, sleeves, etc.) in our workshops Can be tensioned by stapling Indoor and/or outdoor use		
Recommended use	Dressing wooden structures and frames by stapling Decorative blackout curtains (hotels, reception rooms, lounges, etc.) Roman blinds Roller blinds Japanese screens Linings		
Accessories	Production accessories (straps, ballast chain, etc.) Mounting accessories (clamps, knots, carabiners, etc.)		
Optical index:			DIN EN 410 2011
Light reflection	82%		
Light absorption	18%		
Light transmission	0%		
Thermal index:			DIN EN 410 2011
Sunlight reflection	74%		
Sunlight absorption	26%		
Sunlight transmission	0%		
UV Transmission	0%		
Gt / Fc	Gt 33%	Fc 55%	DIN EN 13363 DIN EN 14501
Light fastness	5 / 8		ISO 105 B02
Dimensional stability	Warp: -0.5%	Weft: 0%	ISO 5077
Tensile strength at break	Warp: 62 daN	Weft: 31 daN	ISO 13934-1
Elongation at break	Warp: 26 mm	Weft: 45 mm	ISO 13934-1

CONTACT OUR EXPORT TEAM

+33 (0)6 23 21 50 28



export@azur-scenic.com

The information in this document provides generic values that describe only the standard technical specifications and chemical composition of the products concerned. No guarantee is offered. Any images are non-contractual. The names of the colours are given for information purposes only and do not guarantee a specific colour.