


Fabric with a **slight stretch** woven in polyester and PVC-**treated** on one side, Standex is a **waterproof** material that retains a slight elasticity despite its treatment.


M1 flame-retardant rated, **washable** and very **hard-wearing**, this textile is suitable for use indoors and **outdoors**. Perfect for **dressing stage flats** using staples, it can also be used for **set and stage design**, for making sheaths for covering structures, and more...


The treated side of Standex is plain, with a **smooth, fine finish** and available in a range of colours, while the overside offers a woven look.

Standard colours:
(Regular stock and available cut-to-length)





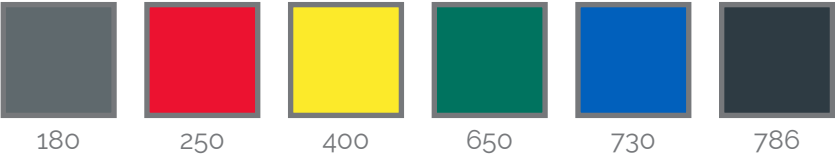


Additional colours:
(Not kept as permanent stock - Cut-to-length depending on availability of colour)



Technical data	Value	Notes
Width	220 cm	
Weight	330 g/m²	
Thickness	0.5 mm	
Flame-retardant rating	 M1	Standard: NF P 92-503
Composition	100% Polyester base + 100% PVC treatment	
Roll length	50 m (rolled full-width)	Cut-to-length possible for in-stock colours. Colours not available: production in 300 m length

Technical data	Value	Notes
Tensile strength	Warp: > 25 daN/5 cm Weft: > 12 daN/5 cm	Standard: ISO 1998
Tear Force	Warp: > 1.5 daN Weft: > 1.5 daN	Standard: ISO 4674-01 2003
Seam resistance	Warp: > 13 daN/5 cm Weft: > 6 daN/5 cm	Standard: ISO 13936-1 2004
Lengthening	Warp: > 9% Weft: > 9%	(Under 30 N/5 cm)
Adhesion	> 2.5 daN/5 cm	Standard: ISO 2411 2000
Crease resistance	200,000 Split-resistant	Standard: ISO 5402 1: 2003
Finishes	Antibacterial treatment (zinc pyrithione)	

Additional information	
Care	     <p>Shrinkage after washing: < 6%</p> <p>We recommend cleaning this product with soap and water only. Cleaning products containing alcohol, solvents, bleach, and harsh abrasives may damage the product.</p> <p>The antimicrobial effect may be reduced with repeated washing.</p> <p>High concentrations of alcohol may damage this product.</p>
Storage recommendations	<p>Store indoors (away from light sources) in a dry place at room temperature.</p> <p>Store rolled to avoid creasing.</p> <p>If stored folded, do not compress.</p>
Cutting recommendations	Cold-cut (low risk of fraying)
Appearance	<p>PVC side is very smooth, flat and coloured.</p> <p>Reverse side has woven effect (mixed white and colour)</p>
Recommended use	<p>Dressing structures, stage scenery and sets, stands, etc.</p> <p>Indoor and outdoor use</p>



CONTACT OUR EXPORT TEAM

+33 (0)6 23 21 50 28



export@azur-scenic.com

The information in this document provides generic values that describe only the standard technical specifications and chemical composition of the products concerned. No guarantee is offered. Any images are non-contractual. The names of the colours are given for information purposes only and do not guarantee a specific colour.