
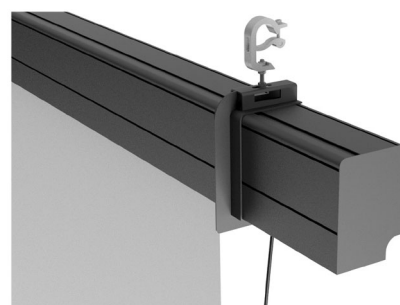


Motorised screen with extra-large dimensions that's also space-efficient

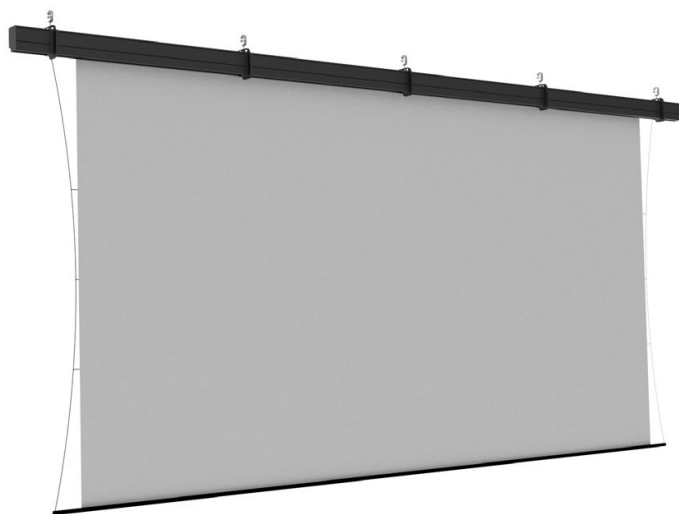

A **motorised roller screen** available entirely **made-to-measure**, designed specially for very large projection surfaces from **8 to 60 m width**.

The roller system is compatible with various projection screens (**front and rear**).

The black extruded aluminium body with 2 longitudinal steel supports gives it a **superb rigidity**. The roller cylinder rests on a cradle made of bearing-mounted ertalon tubing. It is supported by an anti-warp system that uses specially-calibrated suspensions to adjust the differences in level across the full width of the screen.



► Technical specifications

► Cover

Canvas is fully protected by a closed body in black-anodised aluminium for limited weight and improved space-efficiency.

► Roller system

Suspended tubular roller with a full-length anti-warping system.

► Motors

SOMFY tubular dual-motor (5-year guarantee) with motor coupling module for perfect synchronisation.

Standard order options: remote radio-control or wall-mounted (*other controller options available*)

Fine-tuning at end of travel (top and bottom of screen)

Power: 110 Nm

Speed: 17 RPM

Lifting speed: ± 10 cm/s

► Weighting

Integrated weighted pole (2.3 kg/m)

► Fixing

Mounting clamps for rods diameter $\varnothing 48.3$ to 50 mm inclusive

Mountings every 2 to 3 m with possibility to adjust level



► Dimensions

Maximum size is 60 m wide x 10 m high

► Supplied in

Up to 12 m long, can be pre-fitted into a wooden box

Over 12 m, packaged in multiple sections for on-site assembly by a team of specialist technicians

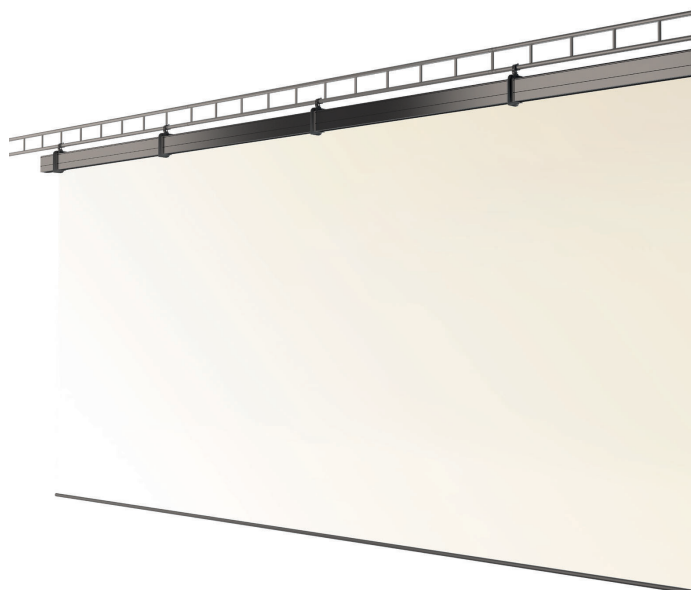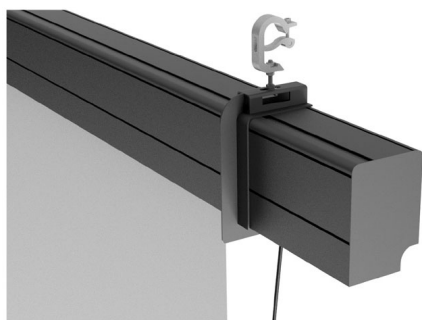

► Compatible canvases



► Front-projection screens

- Matte white
 - Perforated matte white
 - Microperforated matte white
 - Blackout (*matte white with black black-out reverse*)
 - High Contrast
- Special fabrics on request (3D, high performance)*



► Rear-projection

- Cream reverse
- Grey reverse

► Measurements for fastening

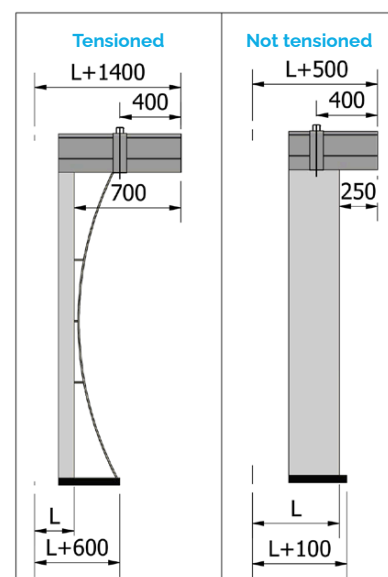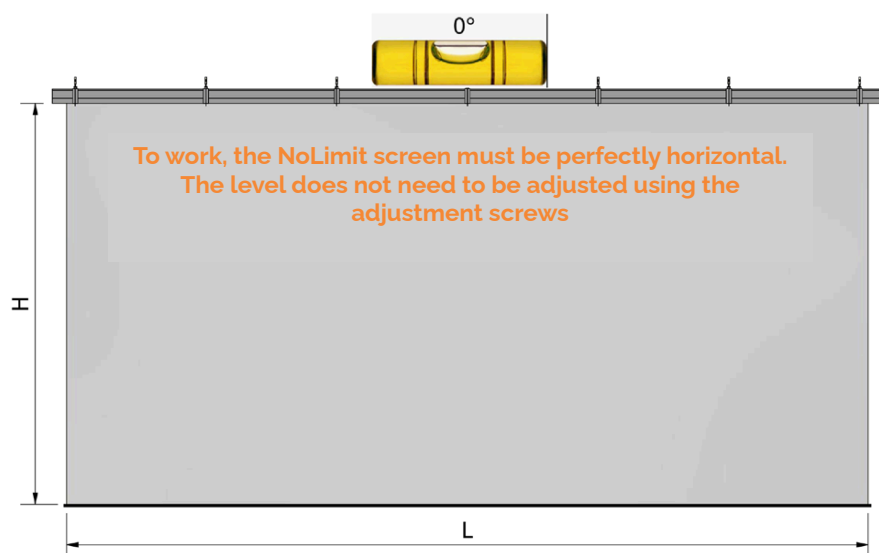


Fastenings

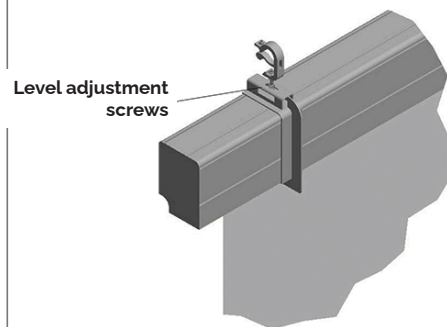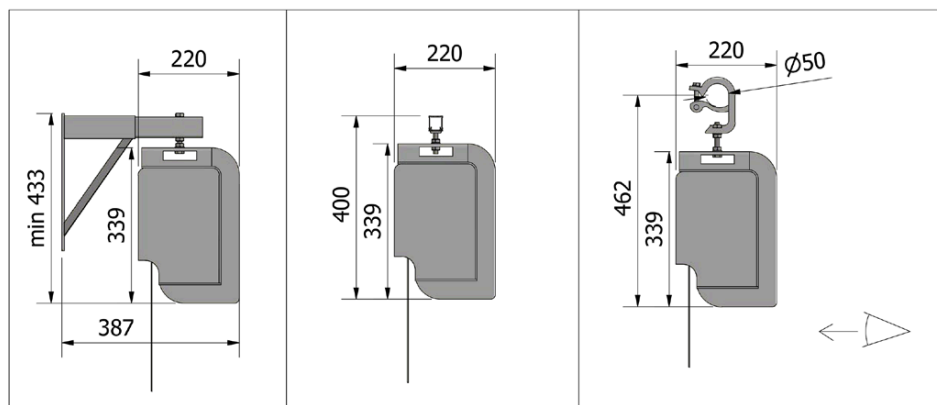

► Optional accessories

- DMX control
- Keyed switch
- Multiple predefined stop programs
- Lateral tensioning
- Wall mountings
- Black edges
- 10 cm black bib on the bottom part
- Motorised masking with vertical movements managed by PLC
- Stopper

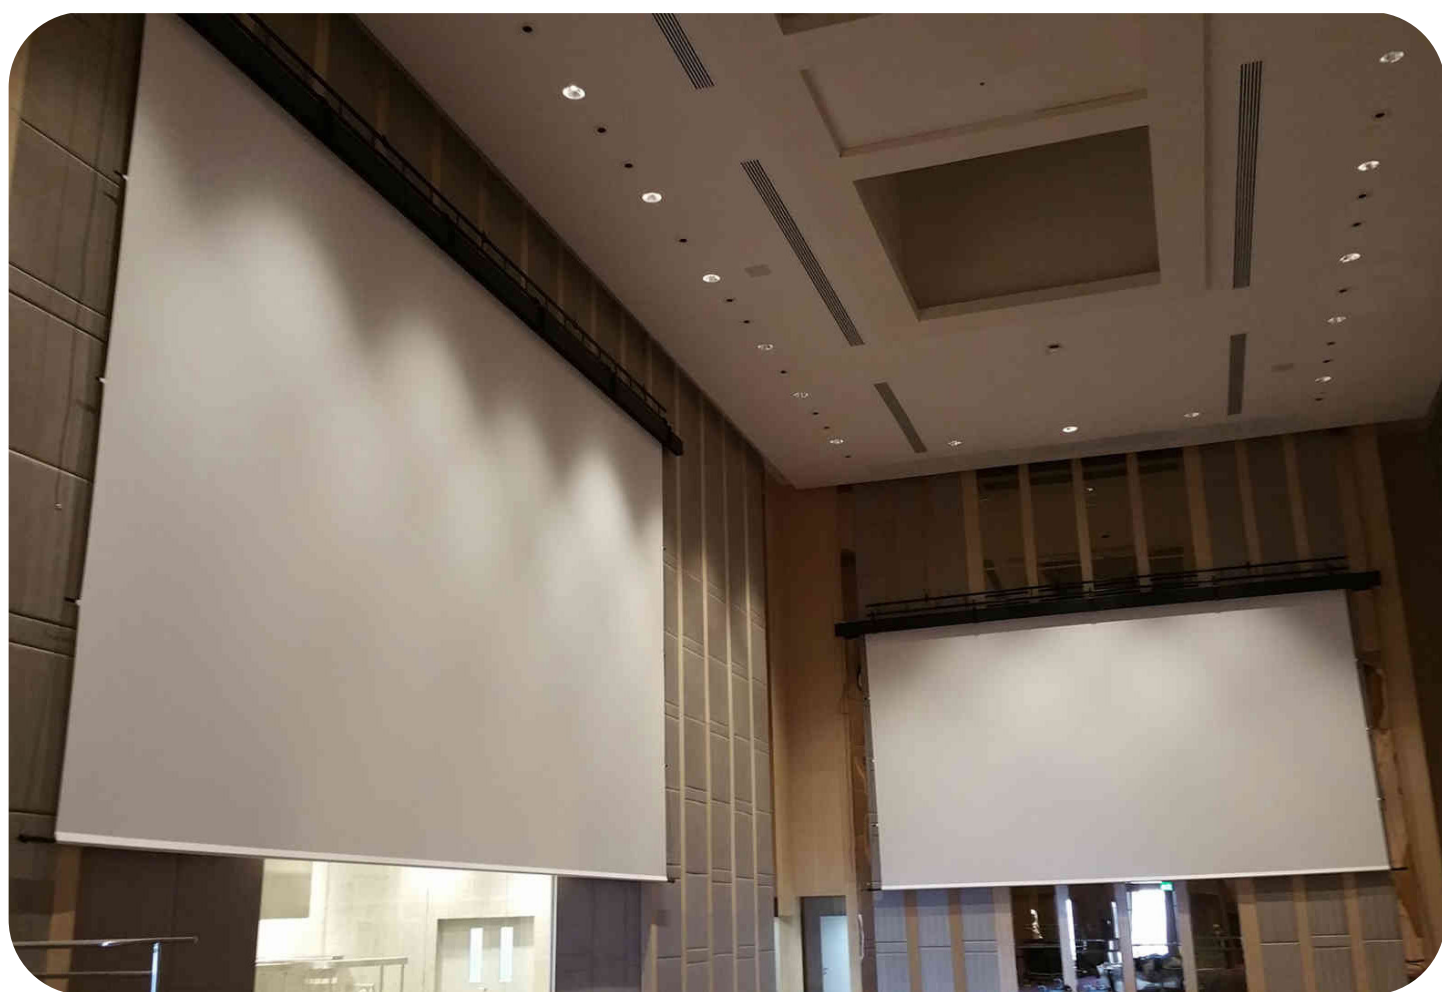

CONTACT OUR EXPORT TEAM

+33 (0)6 23 21 50 28



export@azur-scenic.com

The information in this document provides generic values that describe only the standard technical specifications and chemical composition of the products concerned. No guarantee is offered. Any images are non-contractual. The names of the colours are given for information purposes only and do not guarantee a specific colour.